



T84004 / T84010 / T84035 / T84037

BALLAST COMPATIBLE INSTALLATION

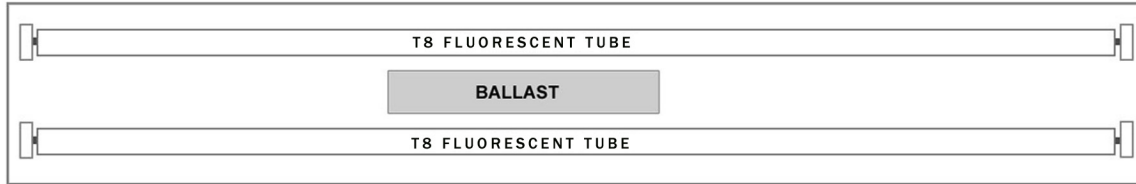

1. Uninstall the T8 fluorescent tube and install the new LED T8 tube.
2. For use with T8 electronic ballast **ONLY**.
3. May not be compatible with all ballasts.
4. Not compatible with magnetic ballasts.

BALLAST BYPASS DOUBLE END INSTALLATION

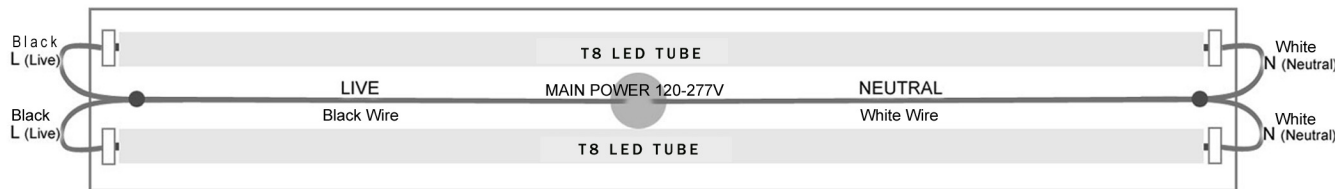

1. Disconnect Main Power.
2. Disconnect and remove existing ballast. (Leave ballast in place if desired, but make sure it is disconnected from mains.)
3. Connect AC straight power 120-277V to the lamp socket as per diagram.