
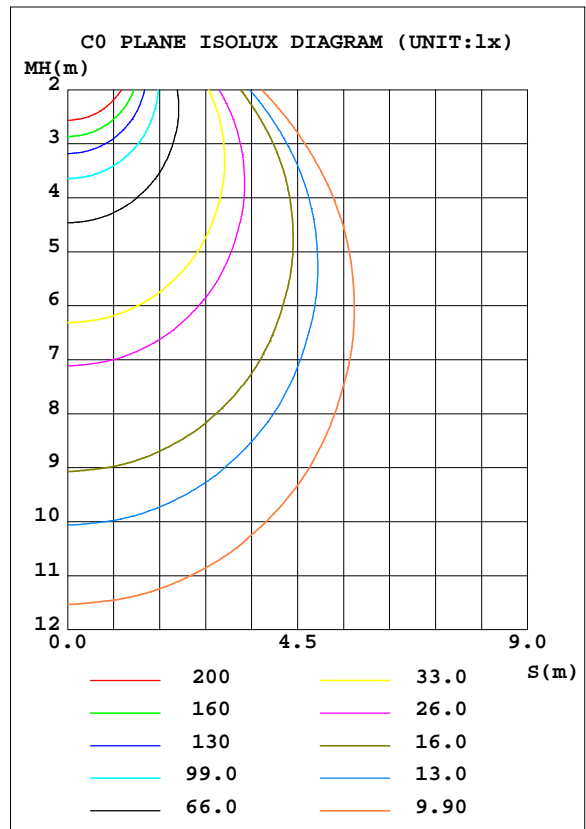


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.99 lm/W			
MODEL	SNC-FL06-30WCT1A1-aaK	Imax(cd)	1317	S/MH(C0/180)	1.30
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3423.1	η UP, DN(C0-180)	0.0,50.7
NOMINAL FLUX(lm)	3423.12	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	100.0	CIBSE SHR MAX	1.35

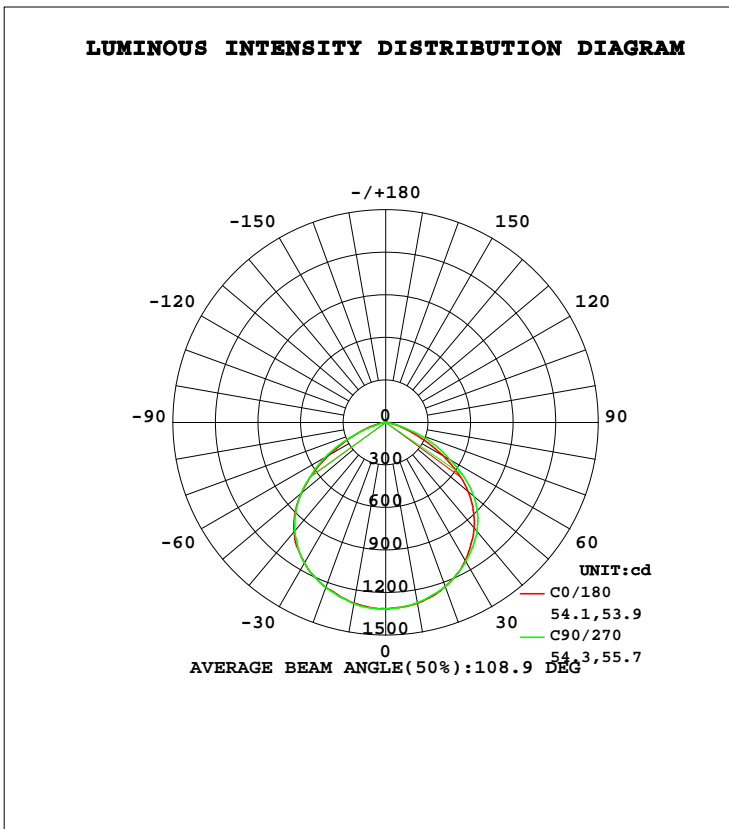

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1294	1294	1290	1300	1294	1293	1298	1292	0- 10	124.4	124.4	3.64,3.64
20	1230	1237	1231	1249	1237	1237	1238	1231	10- 20	358.5	483.0	14.1,14.1
30	1124	1135	1132	1149	1145	1146	1145	1132	20- 30	550.1	1033	30.2,30.2
40	971.4	995.6	1002	1013	1006	1005	998.1	989.6	30- 40	671.8	1705	49.8,49.8
50	762.0	797.4	814.2	813.8	776.8	792.2	778.4	783.0	40- 50	694.9	2400	70.1,70.1
60	464.6	517.5	523.4	531.8	464.4	473.6	496.3	472.4	50- 60	577.5	2977	87,87
70	180.1	204.9	248.2	213.9	188.2	169.1	177.1	167.3	60- 70	333.6	3311	96.7,96.7
80	32.98	30.06	26.25	32.80	37.90	25.29	20.90	23.31	70- 80	101.8	3413	99.7,99.7
90	0	0	0	0	0	0	0	0	80- 90	10.48	3423	100,100
100	0	0	0	0	0	0	0	0	90-100	0	3423	100,100
110	0	0	0	0	0	0	0	0	100-110	0	3423	100,100
120	0	0	0	0	0	0	0	0	110-120	0	3423	100,100
130	0	0	0	0	0	0	0	0	120-130	0	3423	100,100
140	0	0	0	0	0	0	0	0	130-140	0	3423	100,100
150	0	0	0	0	0	0	0	0	140-150	0	3423	100,100
160	0	0	0	0	0	0	0	0	150-160	0	3423	100,100
170	0	0	0	0	0	0	0	0	160-170	0	3423	100,100
180	0	0	0	0	0	0	0	0	170-180	0	3423	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

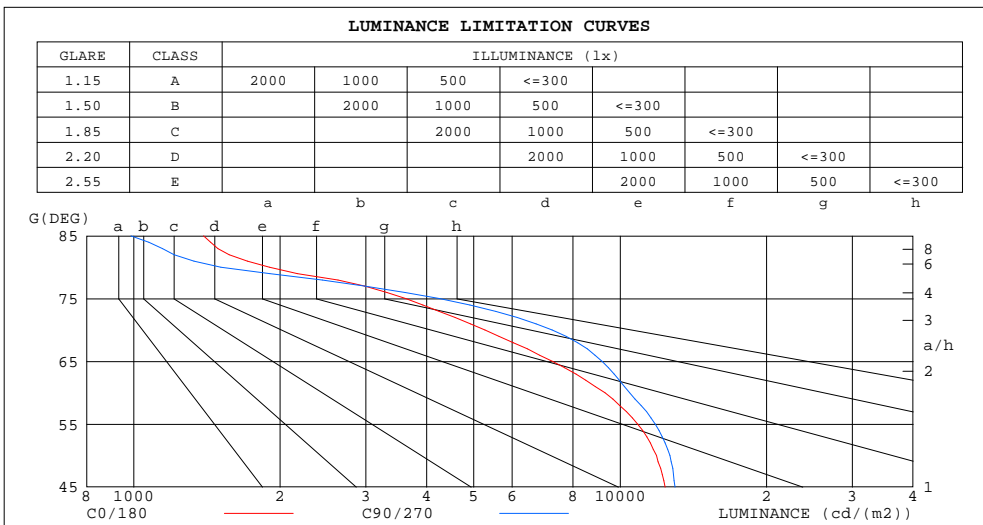

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1393	987
80	1902	1510
75	3626	4258
70	5272	7250
65	7255	9182
60	9306	10459
55	10862	11812
50	11872	12655
45	12370	12967


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.90	.97	.94	.96	.94	.92	.92	.90	.89	.87
2.0	.94	.88	.82	.92	.86	.81	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.68	.76	.71	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.73	.65	.59	.70	.63	.58	.68	.62	.57	.66	.61	.57	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.50	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.39	.50	.44	.39	.49	.43	.39	.37
8.0	.49	.41	.35	.49	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.45	.37	.32	.45	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.30
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

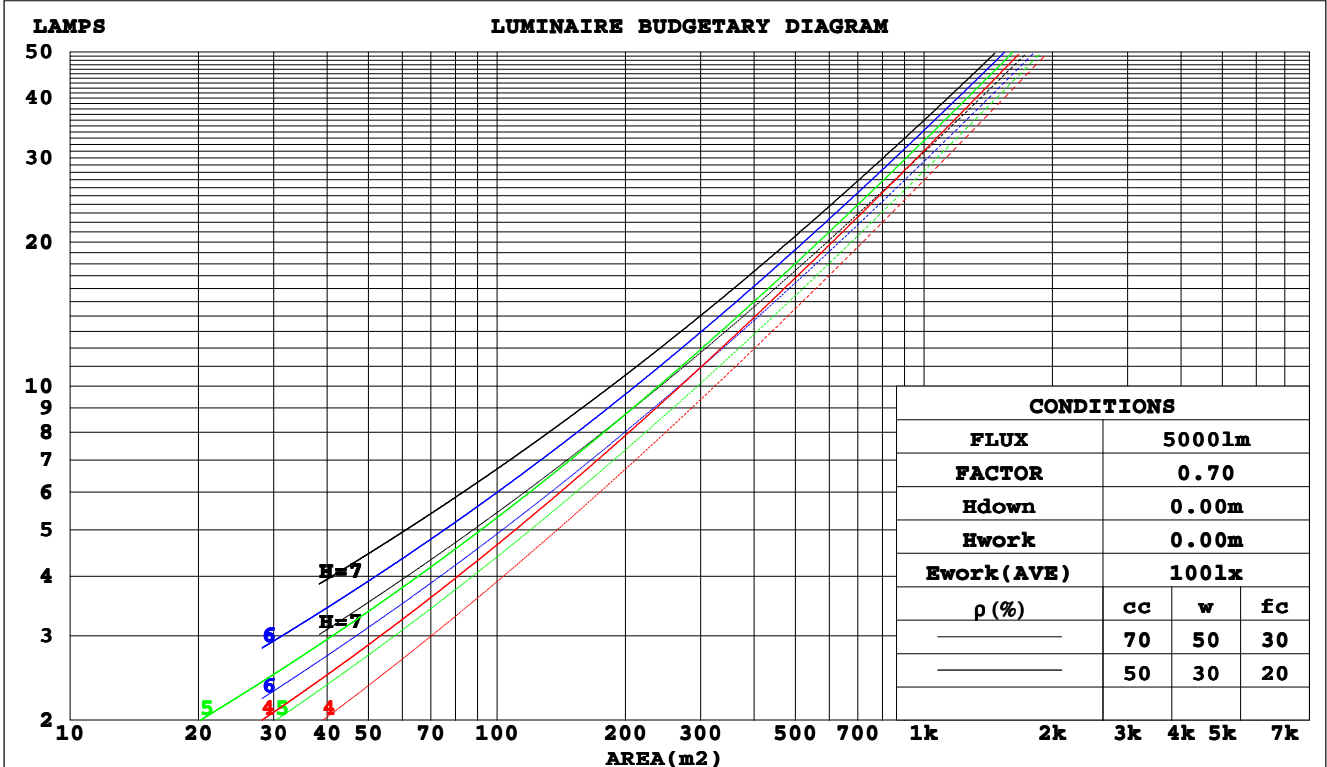

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.267	.152	.048	.260	.148	.047	.247	.142	.045	.235	.136	.044	.224	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.132	.039	.242	.130	.039	.232	.126	.038	.222	.122	.037	.214	.118	.037	
4.0	.232	.121	.035	.227	.119	.035	.218	.116	.035	.210	.113	.034	.202	.110	.034	
5.0	.217	.111	.032	.213	.109	.032	.205	.107	.031	.198	.104	.031	.191	.102	.031	
6.0	.203	.102	.029	.200	.101	.029	.193	.099	.029	.186	.097	.028	.180	.095	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.092	.026	.175	.090	.026	.170	.088	.026	
8.0	.179	.088	.025	.176	.087	.025	.171	.085	.024	.165	.084	.024	.160	.082	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022	.152	.077	.022	
10.0	.159	.076	.021	.157	.076	.021	.152	.075	.021	.148	.073	.021	.144	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.152	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.160	.114	.078	.137	.098	.067	.094	.068	.047	.054	.040	.028	.017	.013	.009	
4.0	.153	.101	.061	.131	.087	.053	.090	.061	.037	.052	.035	.022	.017	.012	.007	
5.0	.146	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006	
6.0	.139	.082	.041	.119	.071	.035	.082	.049	.025	.048	.029	.015	.015	.010	.005	
7.0	.132	.075	.034	.114	.065	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
8.0	.126	.069	.030	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.014	.040	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm										
NAME: SNC-FL06-30WCT1A1-aaK					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: SNC OPTO ELECTRONIC CO.,LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.9	18.3	17.1	18.5	18.7	17.3	18.7	17.5	18.9	19.1
3H	17.5	18.8	17.8	19.0	19.2	18.2	19.5	18.4	19.7	19.9
4H	17.6	18.8	17.9	19.1	19.3	18.3	19.5	18.6	19.8	20.0
6H	17.5	18.7	17.9	19.0	19.2	18.2	19.4	18.6	19.7	19.9
8H	17.5	18.6	17.8	18.9	19.2	18.2	19.3	18.5	19.6	19.9
12H	17.5	18.5	17.8	18.8	19.1	18.1	19.2	18.5	19.5	19.8
4H 2H	17.3	18.5	17.6	18.8	19.0	17.6	18.9	17.9	19.1	19.4
3H	18.0	19.1	18.3	19.4	19.7	18.6	19.7	19.0	20.0	20.3
4H	18.1	19.1	18.5	19.4	19.8	18.8	19.8	19.2	20.1	20.4
6H	18.2	19.0	18.6	19.4	19.7	18.8	19.6	19.2	20.0	20.3
8H	18.1	18.9	18.5	19.3	19.7	18.7	19.5	19.1	19.9	20.3
12H	18.1	18.8	18.5	19.2	19.6	18.7	19.4	19.1	19.8	20.2
8H 4H	18.2	19.0	18.6	19.3	19.7	18.8	19.6	19.2	19.9	20.3
6H	18.2	18.9	18.6	19.3	19.7	18.8	19.4	19.2	19.8	20.2
8H	18.2	18.8	18.6	19.2	19.6	18.7	19.3	19.2	19.7	20.2
12H	18.2	18.7	18.6	19.1	19.6	18.7	19.2	19.2	19.6	20.1
12H 4H	18.1	18.8	18.5	19.2	19.6	18.7	19.5	19.1	19.8	20.2
6H	18.2	18.7	18.6	19.2	19.6	18.7	19.3	19.2	19.7	20.2
8H	18.2	18.6	18.6	19.1	19.6	18.7	19.2	19.2	19.6	20.1
Variations with the observer position at spacings:										
s = 1.0H	+ 0.4 / - 0.5					+ 0.3 / - 0.4				
1.5H	+ 0.4 / - 0.8					+ 0.3 / - 0.6				
2.0H	+ 0.7 / - 0.8					+ 0.7 / - 0.6				

CIE Pub.117, 3423 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.3)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	48	42	58	48	42	35
0.80	71	60	53	70	59	52	68	58	52	45
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	70	85	76	70	83	75	69	63
1.50	91	83	76	90	82	76	87	80	75	68
2.00	98	90	85	96	89	84	93	87	82	75
2.50	102	95	89	100	93	88	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

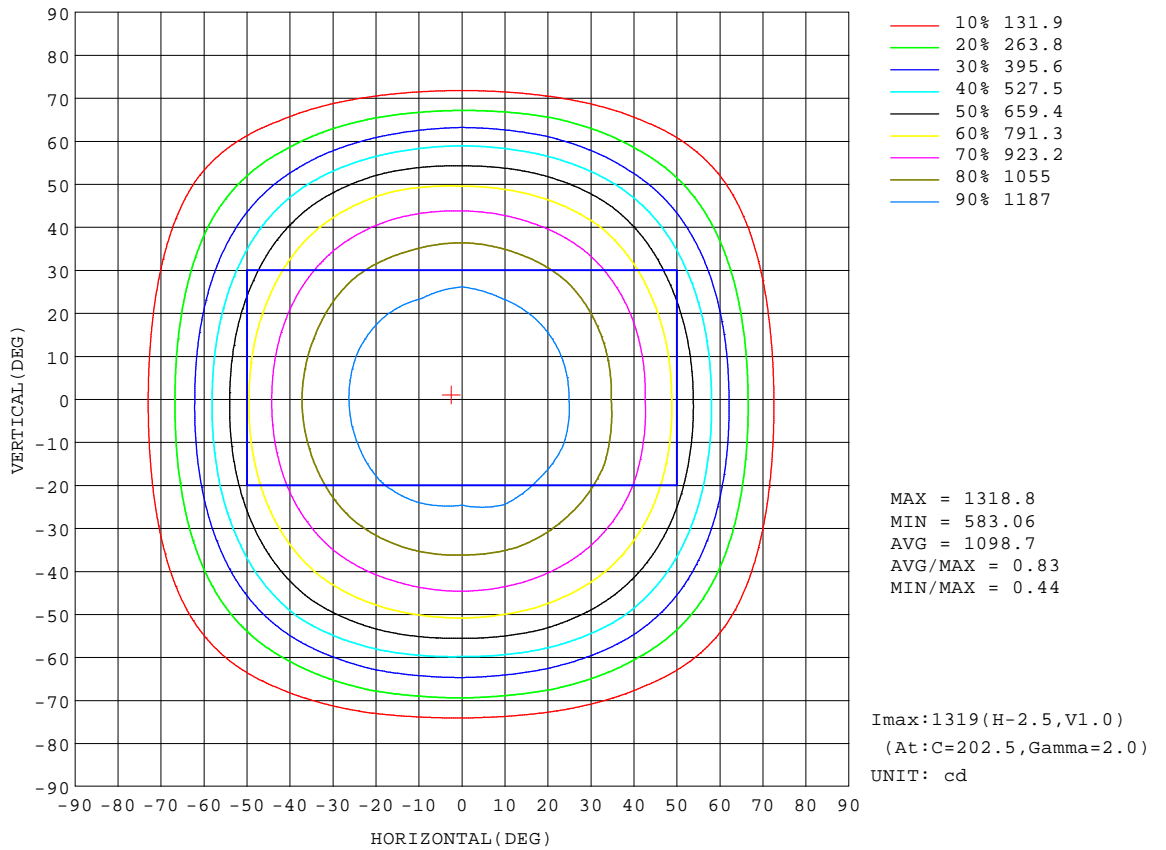


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

AAI Figure

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

Flux out:2654 lm

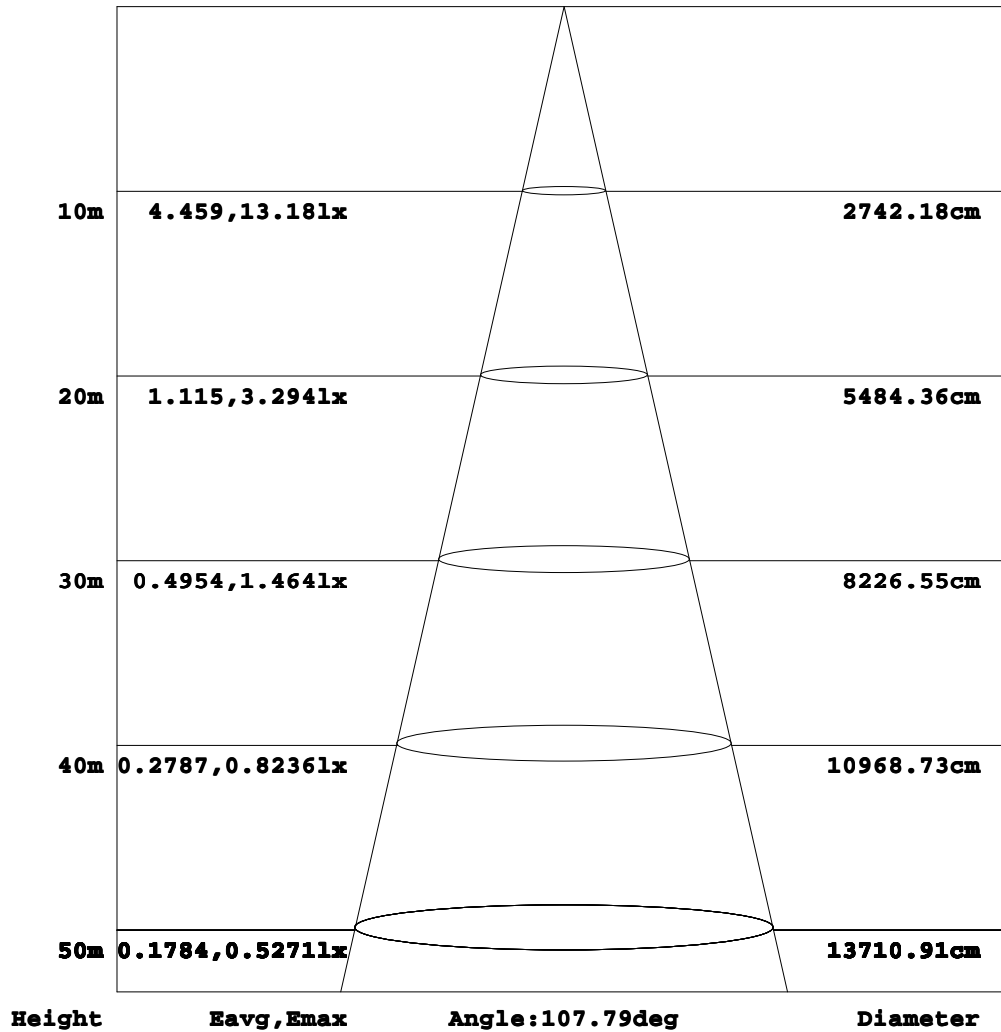


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

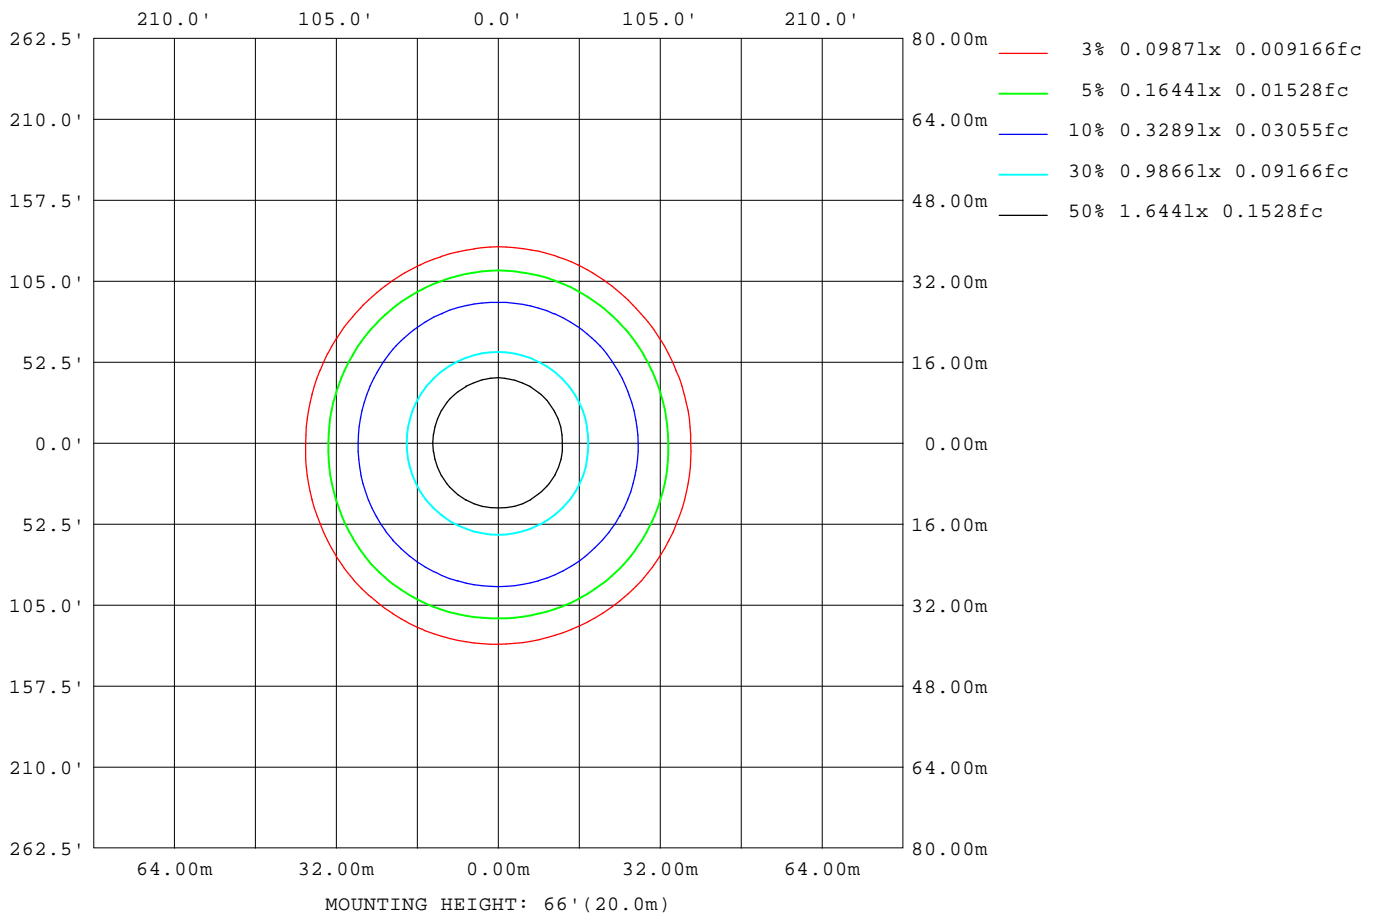

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

LED Avg.L Report

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	7283
L_0~180(75)av	3713
L_0~180(85)av	1409
L_90~270(65)av	8552
L_90~270(75)av	3380
L_90~270(85)av	778
L_45(65)av	7847
L_45(75)av	3178
L_45(85)av	780

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks:

Planar Illuminance Curve

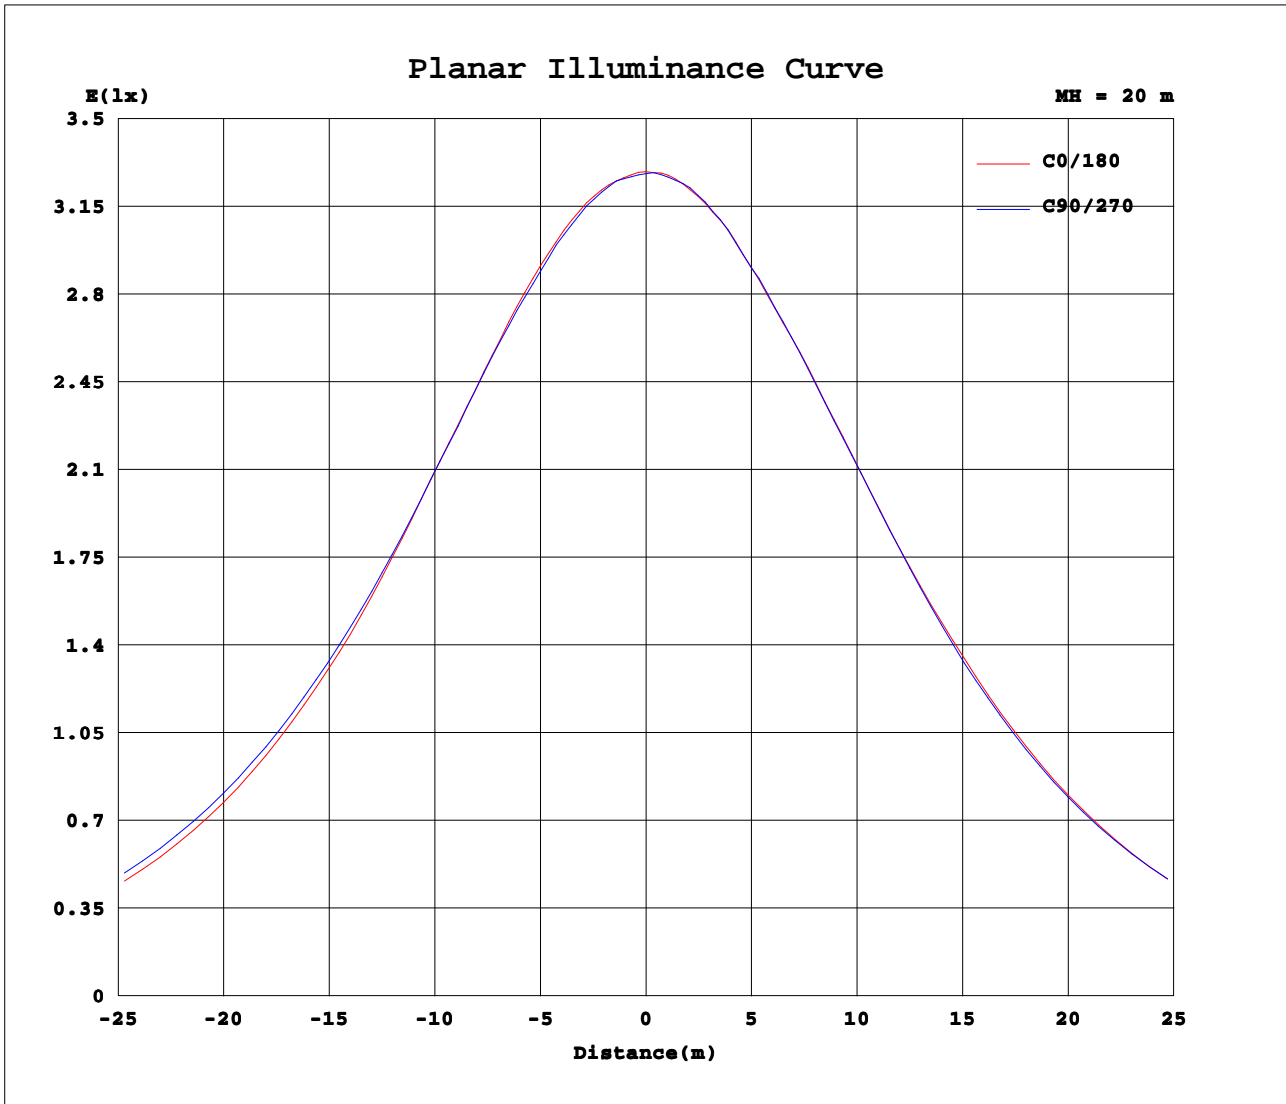

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.2538A P:29.770W PF:0.9774 Freq:60.00Hz Lamp Flux:3423.12x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314	1314			
5	1308	1304	1307	1311	1308	1312	1311	1307	1309	1313	1309	1308	1313	1307	1308	1307			
10	1294	1291	1294	1298	1290	1293	1300	1294	1294	1300	1293	1292	1298	1289	1292	1290			
15	1269	1267	1271	1270	1262	1272	1277	1274	1266	1277	1271	1267	1271	1265	1264	1269			
20	1230	1234	1237	1236	1231	1236	1249	1240	1237	1241	1237	1232	1238	1233	1231	1235			
25	1184	1191	1192	1200	1185	1194	1206	1199	1197	1198	1196	1188	1197	1188	1190	1189			
30	1124	1135	1135	1145	1132	1145	1149	1144	1145	1149	1146	1139	1145	1132	1132	1132			
35	1049	1068	1070	1076	1071	1081	1088	1085	1084	1079	1085	1075	1079	1070	1071	1061			
40	971	989	996	996	1002	1001	1013	1008	1006	1004	1005	997	998	991	990	983			
45	873	896	903	912	918	915	922	916	905	904	910	909	899	894	897	886			
50	762	781	797	807	814	813	814	797	777	777	792	798	778	780	783	762			
55	622	643	664	680	678	686	683	653	627	626	644	649	638	641	641	620			
60	465	488	517	526	523	535	532	491	464	463	474	484	496	488	472	464			
65	306	330	354	378	388	386	361	331	309	311	306	324	334	331	305	303			
70	180	193	205	236	248	243	214	200	188	187	169	174	177	176	167	175			
75	93.7	97.9	90.6	104	110	112	99.9	102	98.5	89.6	71.8	70.3	64.6	65.0	66.7	80.4			
80	33.0	32.8	30.1	27.9	26.3	29.0	32.8	35.0	37.9	28.9	25.3	22.2	20.9	20.4	23.3	25.7			
85	12.1	10.5	7.68	8.18	8.61	8.66	7.18	9.80	12.4	9.50	6.24	5.96	4.95	5.54	6.10	9.17			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks: