
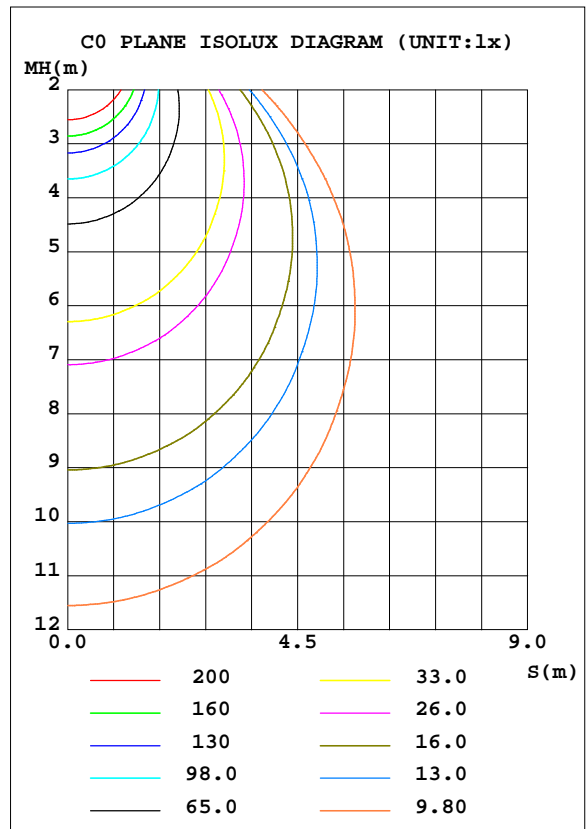


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.27 lm/W			
MODEL	SNC-FL06-30WCT1A1-aaK	Imax(cd)	1308	S/MH(C0/180)	1.30
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	3404.0	η UP, DN(C0-180)	0.0,50.7
NOMINAL FLUX(lm)	3403.66	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	277.0	η down(%)	100.0	CIBSE SHR MAX	1.35

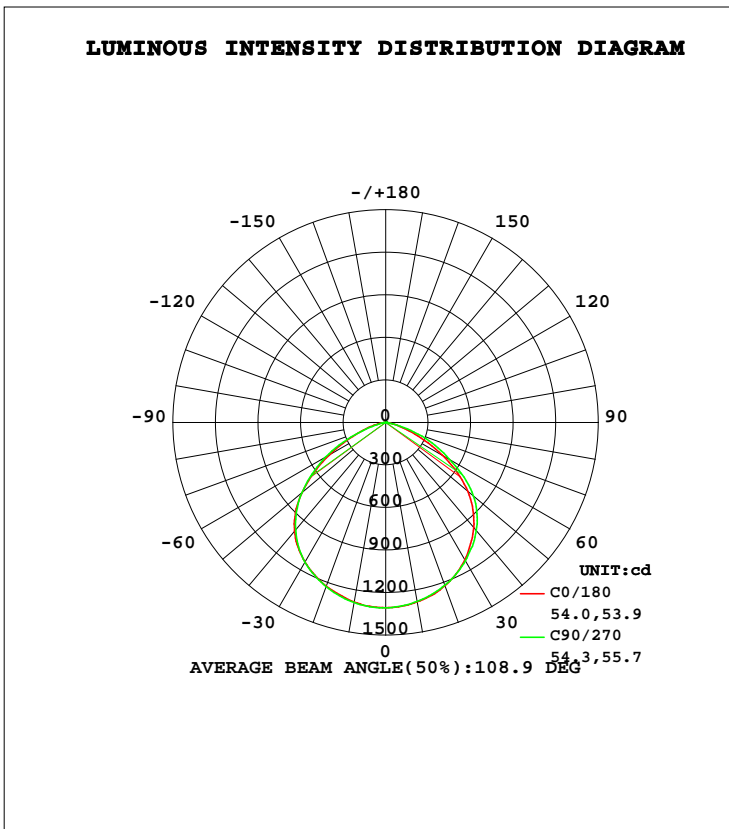

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1285	1289	1281	1291	1285	1285	1289	1282	0- 10	123.8	123.8	3.64,3.64
20	1224	1232	1221	1241	1229	1229	1232	1225	10- 20	356.5	480.3	14.1,14.1
30	1119	1130	1126	1144	1138	1140	1139	1126	20- 30	547.1	1027	30.2,30.2
40	966.3	991.4	994.5	1008	1000	998.2	988.8	983.1	30- 40	668.3	1696	49.8,49.8
50	758.9	792.5	809.6	810.5	771.2	785.1	773.0	778.6	40- 50	691.2	2387	70.1,70.1
60	462.4	513.8	520.1	529.0	460.9	471.1	491.5	469.1	50- 60	574.0	2961	87,87
70	179.8	204.0	246.4	213.0	186.9	167.4	174.9	166.2	60- 70	331.5	3292	96.7,96.7
80	32.76	29.91	25.86	32.66	37.23	25.21	20.75	23.12	70- 80	101.1	3394	99.7,99.7
90	0	0	0	0	0	0	0	0	80- 90	10.44	3404	100,100
100	0	0	0	0	0	0	0	0	90-100	0	3404	100,100
110	0	0	0	0	0	0	0	0	100-110	0	3404	100,100
120	0	0	0	0	0	0	0	0	110-120	0	3404	100,100
130	0	0	0	0	0	0	0	0	120-130	0	3404	100,100
140	0	0	0	0	0	0	0	0	130-140	0	3404	100,100
150	0	0	0	0	0	0	0	0	140-150	0	3404	100,100
160	0	0	0	0	0	0	0	0	150-160	0	3404	100,100
170	0	0	0	0	0	0	0	0	160-170	0	3404	100,100
180	0	0	0	0	0	0	0	0	170-180	0	3404	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

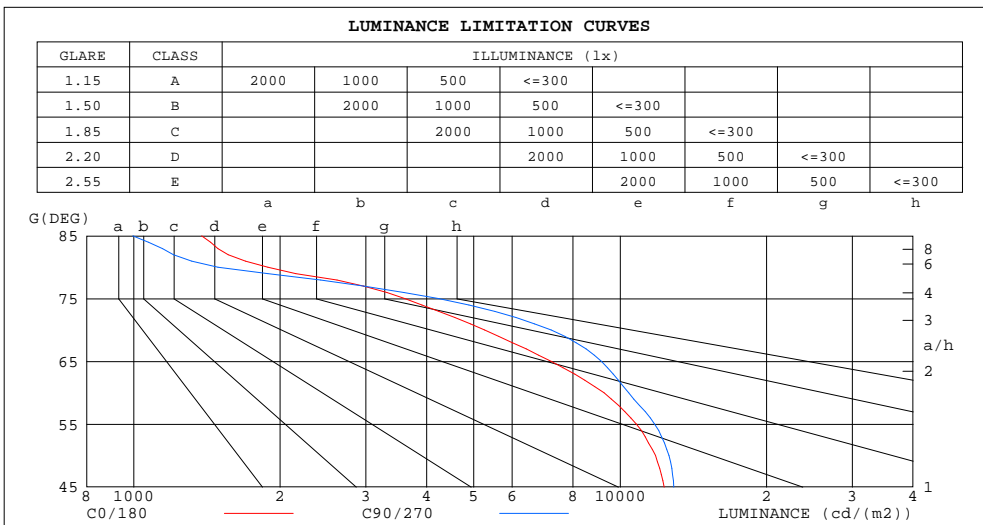

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1379	996
80	1888	1490
75	3608	4236
70	5262	7209
65	7215	9151
60	9257	10408
55	10800	11773
50	11819	12602
45	12316	12896


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.02	.99	1.04	1.01	.97	.90	.97	.94	.96	.94	.92	.92	.90	.89	.87
2.0	.94	.88	.82	.92	.86	.81	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.68	.76	.71	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.73	.65	.59	.70	.63	.58	.68	.62	.57	.66	.61	.57	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.50	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.39	.50	.44	.39	.49	.43	.39	.37
8.0	.49	.41	.35	.49	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.45	.37	.32	.45	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.30
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

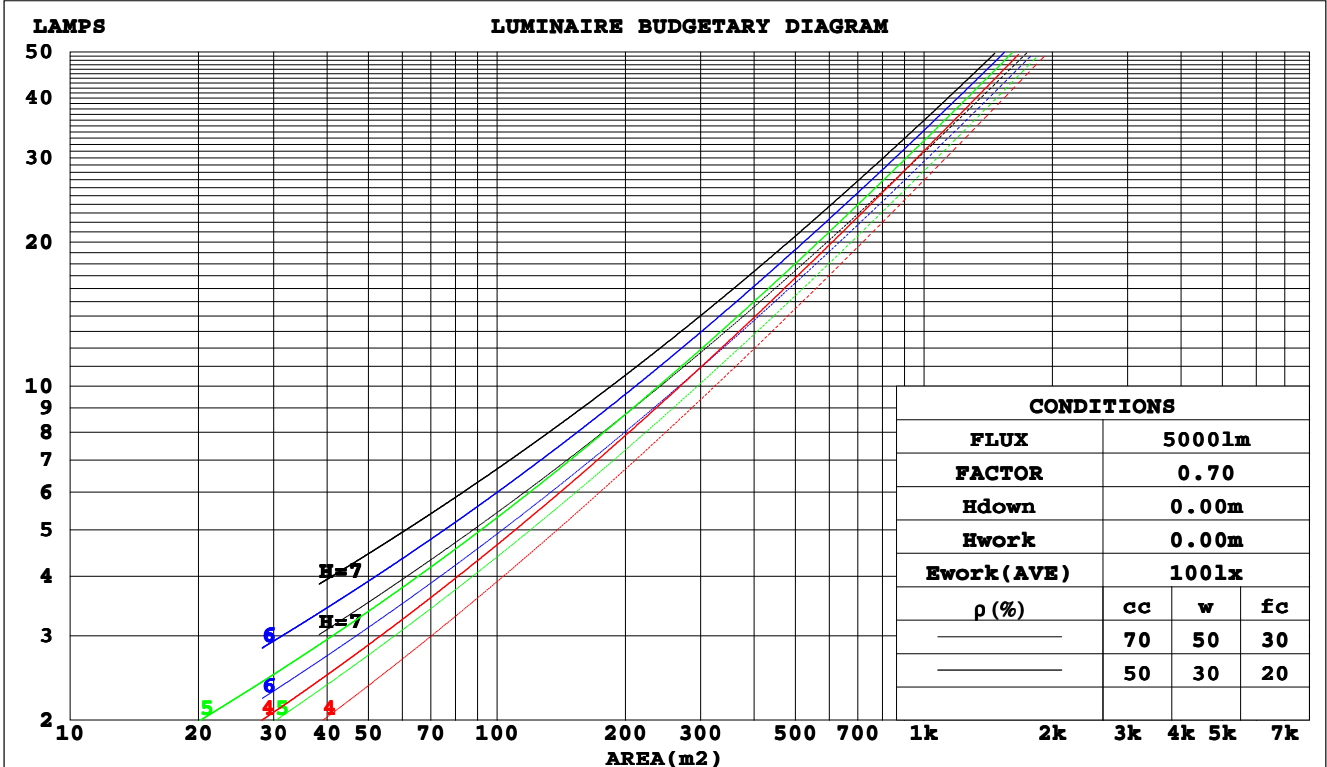

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

WEC AND CCEC

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.267	.152	.048	.260	.148	.047	.247	.142	.045	.235	.136	.044	.224	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.132	.039	.242	.130	.039	.232	.126	.038	.222	.122	.037	.214	.118	.037	
4.0	.232	.121	.035	.227	.119	.035	.218	.116	.035	.210	.113	.034	.202	.110	.034	
5.0	.217	.111	.032	.213	.109	.032	.205	.107	.031	.198	.104	.031	.191	.102	.031	
6.0	.203	.102	.029	.200	.101	.029	.193	.099	.029	.186	.097	.028	.180	.095	.028	
7.0	.191	.094	.027	.187	.093	.027	.181	.092	.026	.175	.090	.026	.170	.088	.026	
8.0	.179	.088	.025	.176	.087	.025	.171	.085	.024	.165	.084	.024	.160	.082	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022	.152	.077	.022	
10.0	.159	.076	.021	.157	.076	.021	.152	.075	.021	.148	.073	.021	.144	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.160	.114	.078	.137	.098	.067	.094	.068	.047	.054	.040	.028	.017	.013	.009	
4.0	.153	.101	.061	.131	.087	.053	.090	.061	.037	.052	.035	.022	.017	.012	.007	
5.0	.146	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006	
6.0	.139	.082	.041	.119	.071	.035	.082	.049	.025	.048	.029	.015	.015	.010	.005	
7.0	.132	.075	.034	.114	.065	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
8.0	.126	.069	.030	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.014	.040	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm										
NAME: SNC-FL06-30WCT1A1-aaK					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: SNC OPTO ELECTRONIC CO.,LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.9	18.3	17.1	18.5	18.7	17.3	18.7	17.5	18.9	19.1
3H	17.5	18.8	17.8	19.0	19.2	18.2	19.5	18.5	19.7	19.9
4H	17.6	18.8	17.9	19.1	19.3	18.3	19.5	18.6	19.8	20.0
6H	17.5	18.7	17.9	19.0	19.2	18.2	19.4	18.6	19.7	20.0
8H	17.5	18.6	17.8	18.9	19.2	18.2	19.3	18.5	19.6	19.9
12H	17.5	18.5	17.8	18.8	19.1	18.2	19.2	18.5	19.5	19.8
4H 2H	17.3	18.5	17.6	18.8	19.0	17.6	18.9	17.9	19.1	19.4
3H	18.0	19.1	18.3	19.4	19.7	18.6	19.7	19.0	20.0	20.3
4H	18.1	19.1	18.5	19.4	19.8	18.8	19.8	19.2	20.1	20.4
6H	18.2	19.0	18.6	19.4	19.7	18.8	19.6	19.2	20.0	20.3
8H	18.1	18.9	18.5	19.3	19.7	18.7	19.5	19.1	19.9	20.3
12H	18.1	18.8	18.5	19.2	19.6	18.7	19.4	19.1	19.8	20.2
8H 4H	18.2	19.0	18.6	19.3	19.7	18.8	19.6	19.2	19.9	20.3
6H	18.2	18.9	18.6	19.3	19.7	18.8	19.4	19.2	19.8	20.3
8H	18.2	18.8	18.6	19.2	19.6	18.7	19.3	19.2	19.7	20.2
12H	18.2	18.7	18.6	19.1	19.6	18.7	19.2	19.2	19.7	20.1
12H 4H	18.1	18.8	18.5	19.2	19.6	18.7	19.5	19.2	19.8	20.2
6H	18.2	18.7	18.6	19.2	19.6	18.7	19.3	19.2	19.7	20.2
8H	18.2	18.7	18.6	19.1	19.6	18.7	19.2	19.2	19.7	20.1
Variations with the observer position at spacings:										
s = 1.0H	+ 0.4 / - 0.5					+ 0.3 / - 0.4				
1.5H	+ 0.4 / - 0.7					+ 0.3 / - 0.6				
2.0H	+ 0.7 / - 0.8					+ 0.7 / - 0.6				

CIE Pub.117, 3404 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.3)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	48	42	58	48	42	36
0.80	71	60	53	70	59	52	68	58	52	45
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	71	85	76	70	83	75	69	63
1.50	91	83	76	90	82	76	87	80	75	68
2.00	98	90	85	96	89	84	93	87	82	75
2.50	102	95	89	100	93	88	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	103	108	104	101	103	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

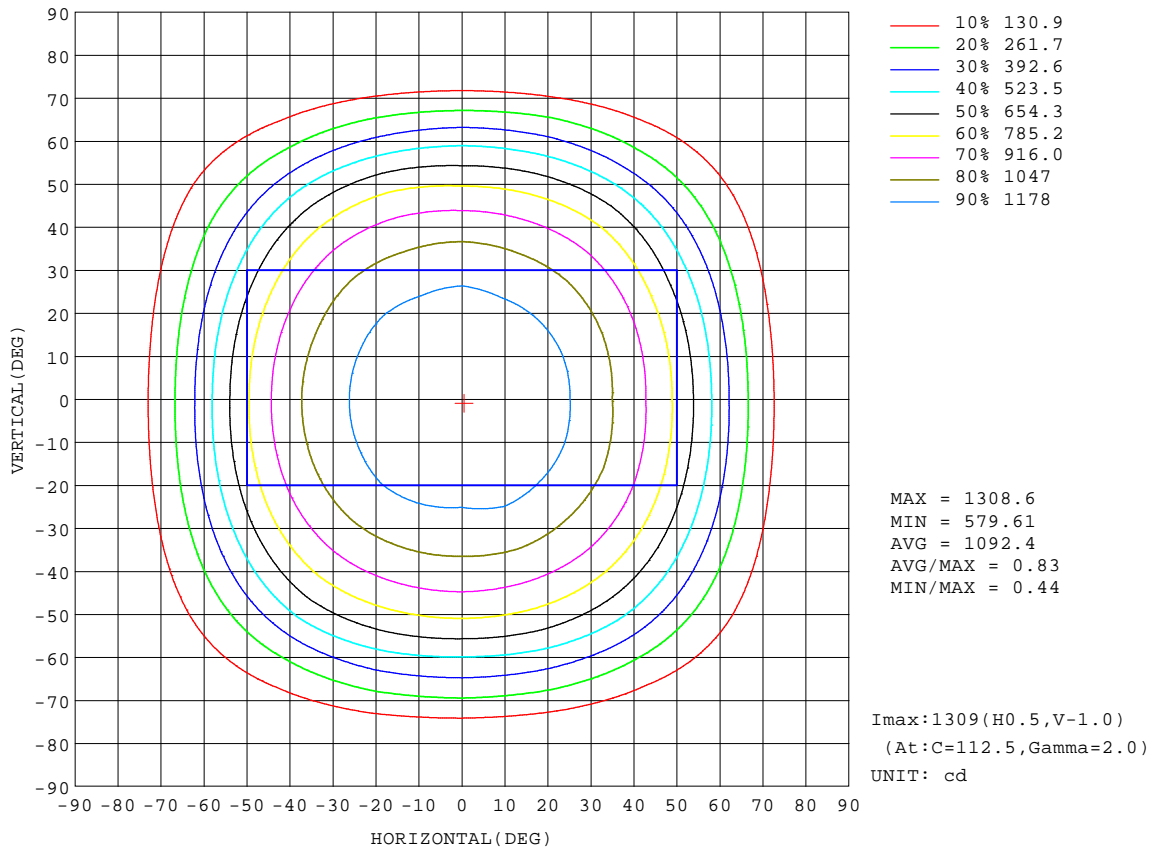


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

AAI Figure

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

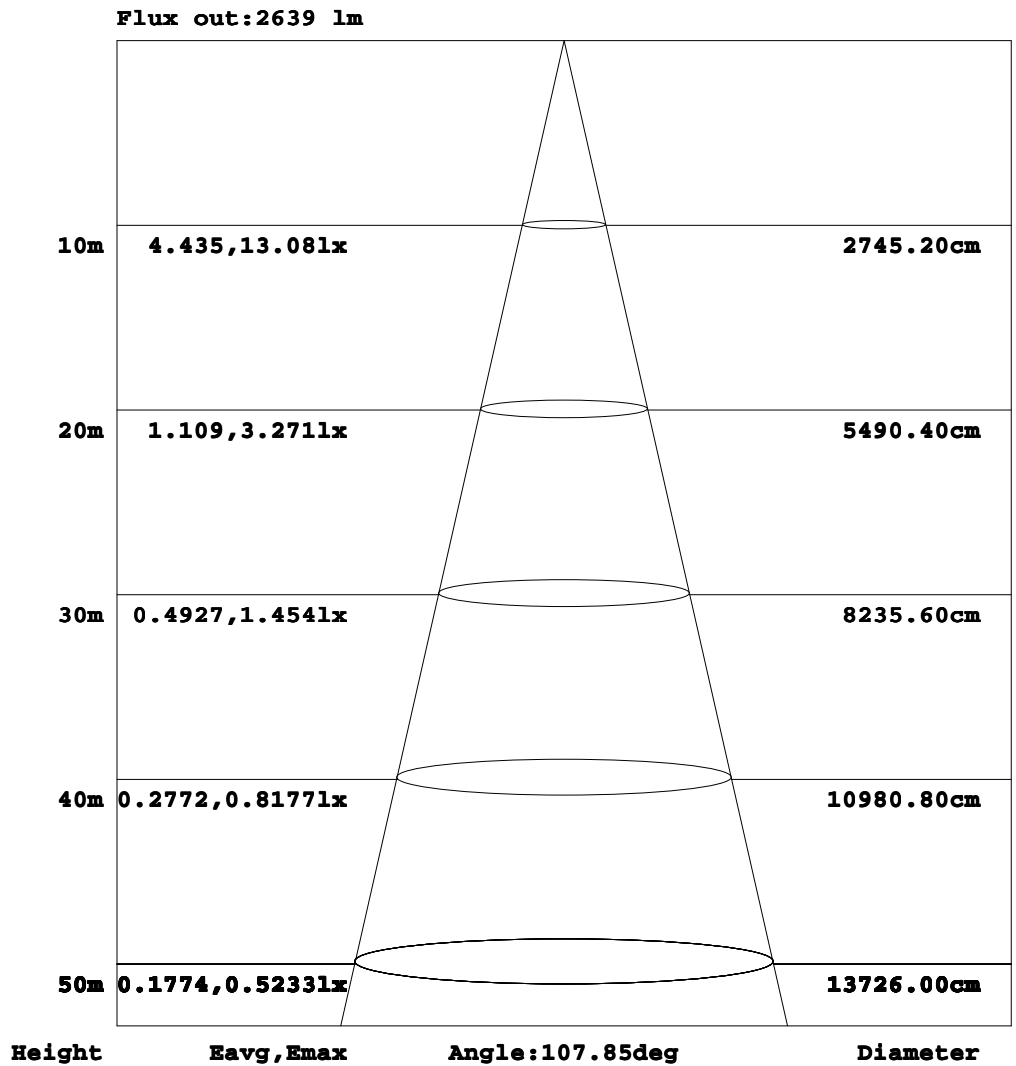


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

ISOLUX DIAGRAM

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

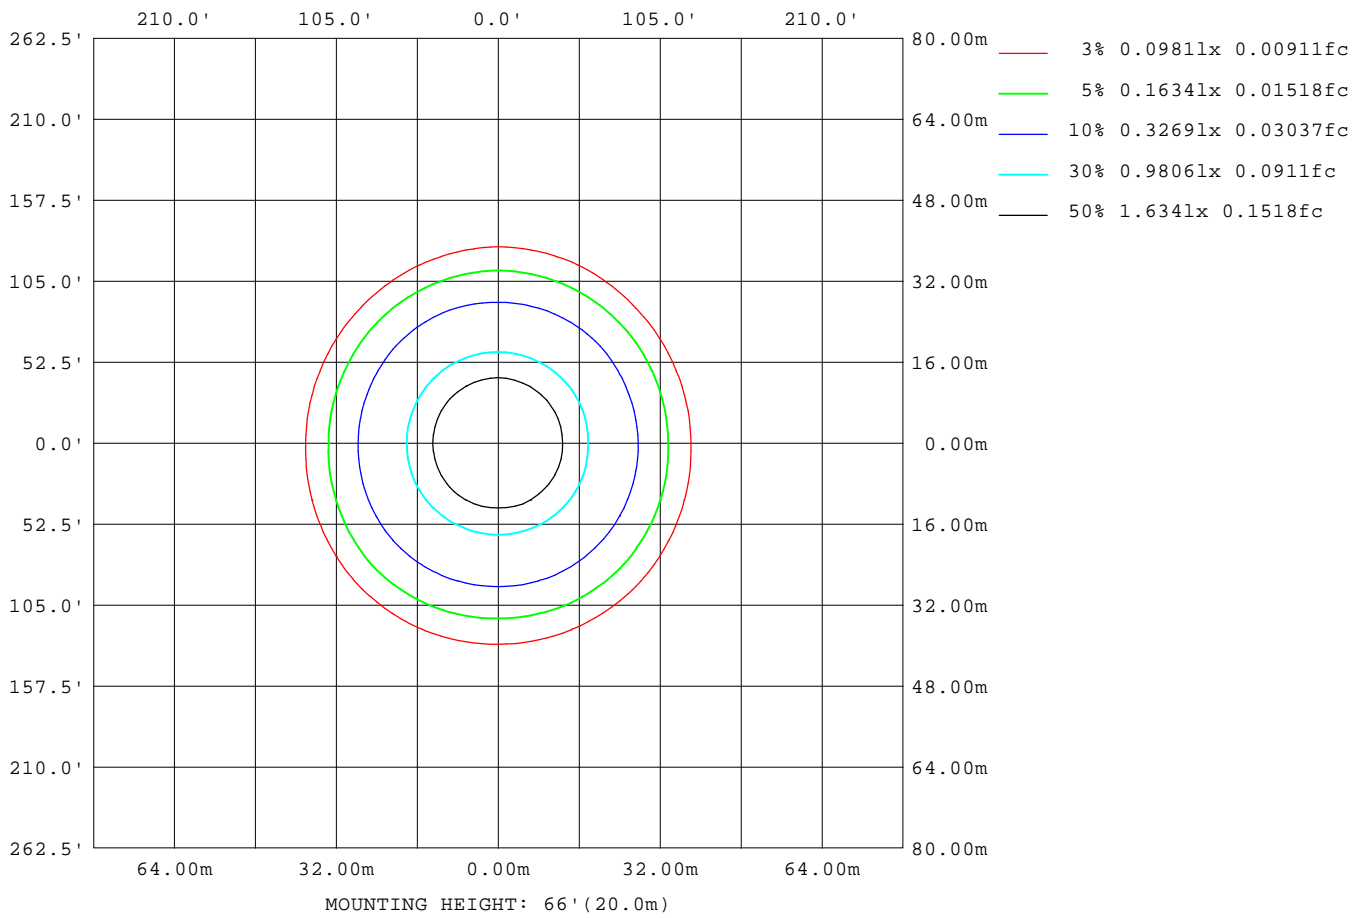

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

LED Avg.L Report

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	7232
L_0~180(75)av	3691
L_0~180(85)av	1393
L_90~270(65)av	8492
L_90~270(75)av	3353
L_90~270(85)av	783
L_45(65)av	7806
L_45(75)av	3151
L_45(85)av	773

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-10-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks:

Planar Illuminance Curve

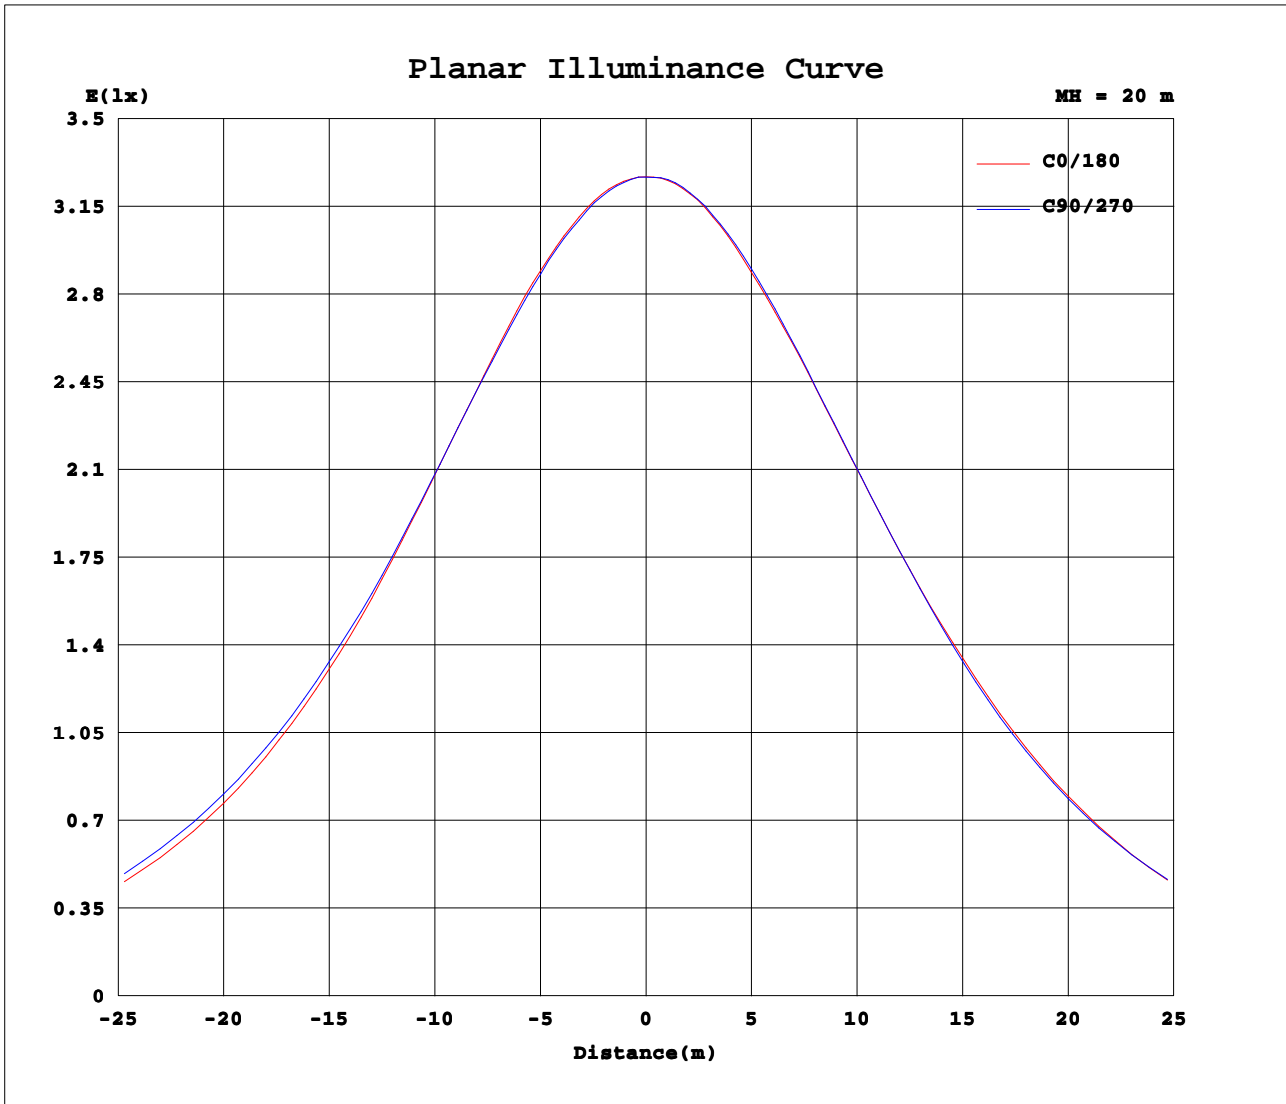

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.00V I:0.1138A P:29.790W PF:0.9452 Freq:60.00Hz Lamp Flux:3403.66x1 lm		
NAME: SNC-FL06-30WCT1A1-aaK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306			
5	1301	1299	1300	1305	1299	1303	1303	1301	1302	1303	1300	1302	1305	1299	1300	1303			
10	1285	1285	1289	1291	1281	1290	1291	1287	1285	1291	1285	1286	1289	1283	1282	1285			
15	1261	1261	1266	1266	1255	1264	1270	1268	1258	1264	1262	1262	1265	1257	1257	1262			
20	1224	1227	1232	1232	1221	1231	1241	1235	1229	1233	1229	1225	1232	1225	1225	1229			
25	1178	1185	1188	1193	1179	1189	1200	1195	1187	1189	1189	1184	1189	1182	1183	1184			
30	1119	1131	1130	1141	1126	1139	1144	1140	1138	1139	1140	1133	1139	1127	1126	1125			
35	1045	1063	1065	1074	1066	1076	1083	1079	1077	1072	1078	1068	1072	1064	1064	1058			
40	966	984	991	994	994	998	1008	1005	1000	997	998	991	989	985	983	979			
45	870	891	902	907	911	914	917	912	901	899	905	904	891	892	891	880			
50	759	775	792	803	810	810	811	794	771	772	785	793	773	776	779	757			
55	619	639	662	676	675	683	680	649	622	621	640	646	634	637	636	615			
60	462	485	514	523	520	532	529	489	461	459	471	482	491	485	469	461			
65	305	328	352	376	387	385	360	331	307	309	304	322	331	329	303	301			
70	180	193	204	235	246	242	213	199	187	185	167	172	175	174	166	174			
75	93.3	97.6	90.0	104	110	111	99.1	101	97.8	89.0	71.1	69.9	64.0	64.3	66.0	79.8			
80	32.8	32.6	29.9	27.7	25.9	28.9	32.7	35.2	37.2	28.7	25.2	22.1	20.7	20.2	23.1	25.7			
85	12.0	10.4	7.72	8.34	8.68	8.53	7.26	9.81	12.3	9.59	6.04	5.84	4.97	5.48	5.91	9.20			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-10-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks: