
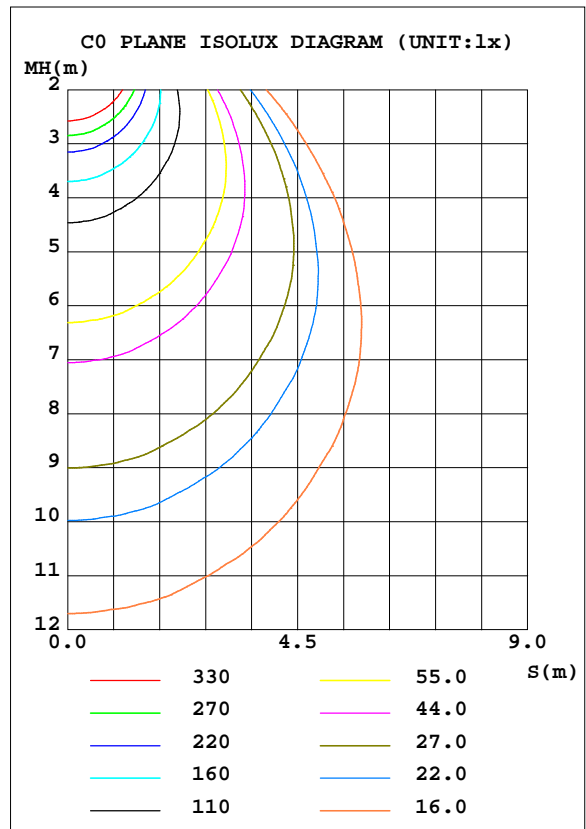


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 116.23 lm/W			
MODEL	SNC-FL06-50WCT1A1	Imax(cd)	2198	S/MH(C0/180)	1.29
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5762.5	η UP, DN(C0-180)	0.0,50.4
NOMINAL FLUX(lm)	5762.52	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	100.0	CIBSE SHR MAX	1.35

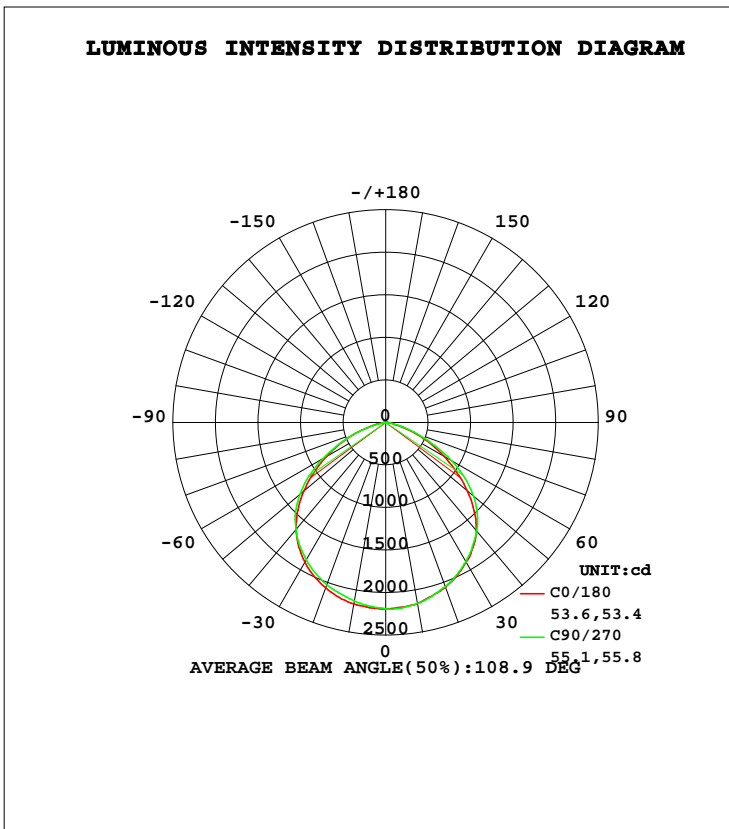

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2161	2155	2160	2163	2166	2154	2131	2158	0- 10	207.4	207.4	3.6,3.6
20	2061	2075	2053	2060	2067	2072	2030	2066	10- 20	597.6	805.1	14,14
30	1895	1909	1889	1907	1899	1897	1867	1895	20- 30	916.8	1722	29.9,29.9
40	1659	1664	1667	1665	1639	1656	1641	1657	30- 40	1118	2840	49.3,49.3
50	1254	1298	1352	1313	1258	1299	1315	1294	40- 50	1147	3987	69.2,69.2
60	790.6	837.8	888.3	859.9	806.5	827.3	858.1	824.1	50- 60	958.1	4945	85.8,85.8
70	356.9	396.5	396.9	411.2	383.5	367.5	371.4	349.9	60- 70	594.9	5540	96.1,96.1
80	61.51	61.76	55.08	68.14	66.93	51.14	29.37	46.56	70- 80	206.8	5747	99.7,99.7
90	0	0	0	0	0	0	0	0	80- 90	15.80	5763	100,100
100	0	0	0	0	0	0	0	0	90-100	0	5763	100,100
110	0	0	0	0	0	0	0	0	100-110	0	5763	100,100
120	0	0	0	0	0	0	0	0	110-120	0	5763	100,100
130	0	0	0	0	0	0	0	0	120-130	0	5763	100,100
140	0	0	0	0	0	0	0	0	130-140	0	5763	100,100
150	0	0	0	0	0	0	0	0	140-150	0	5763	100,100
160	0	0	0	0	0	0	0	0	150-160	0	5763	100,100
170	0	0	0	0	0	0	0	0	160-170	0	5763	100,100
180	0	0	0	0	0	0	0	0	170-180	0	5763	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

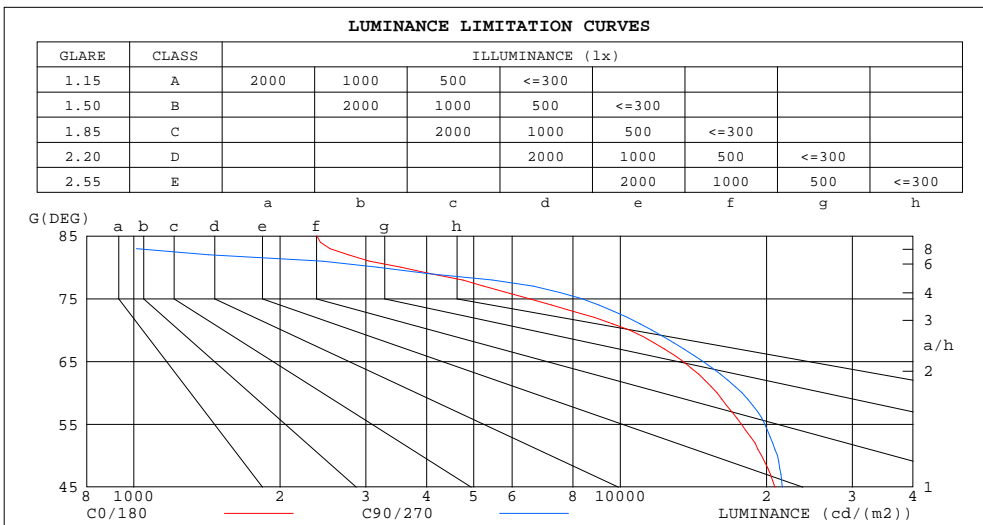

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2378	83
80	3542	3175
75	6487	8337
70	10435	11618
65	13470	14799
60	15813	17785
55	17741	19829
50	19511	21055
45	20789	21541


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.96	.93	.91	.92	.90	.89	.87
2.0	.93	.87	.82	.91	.86	.81	.88	.83	.79	.85	.81	.77	.82	.78	.76	.73
3.0	.82	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.66	.73	.68	.65	.63
4.0	.73	.65	.59	.72	.64	.58	.70	.63	.58	.67	.61	.57	.65	.60	.56	.54
5.0	.66	.57	.51	.65	.57	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.47
6.0	.59	.51	.44	.58	.50	.44	.57	.49	.44	.55	.48	.43	.53	.48	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.39	.49	.43	.38	.36
8.0	.49	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.32
9.0	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26

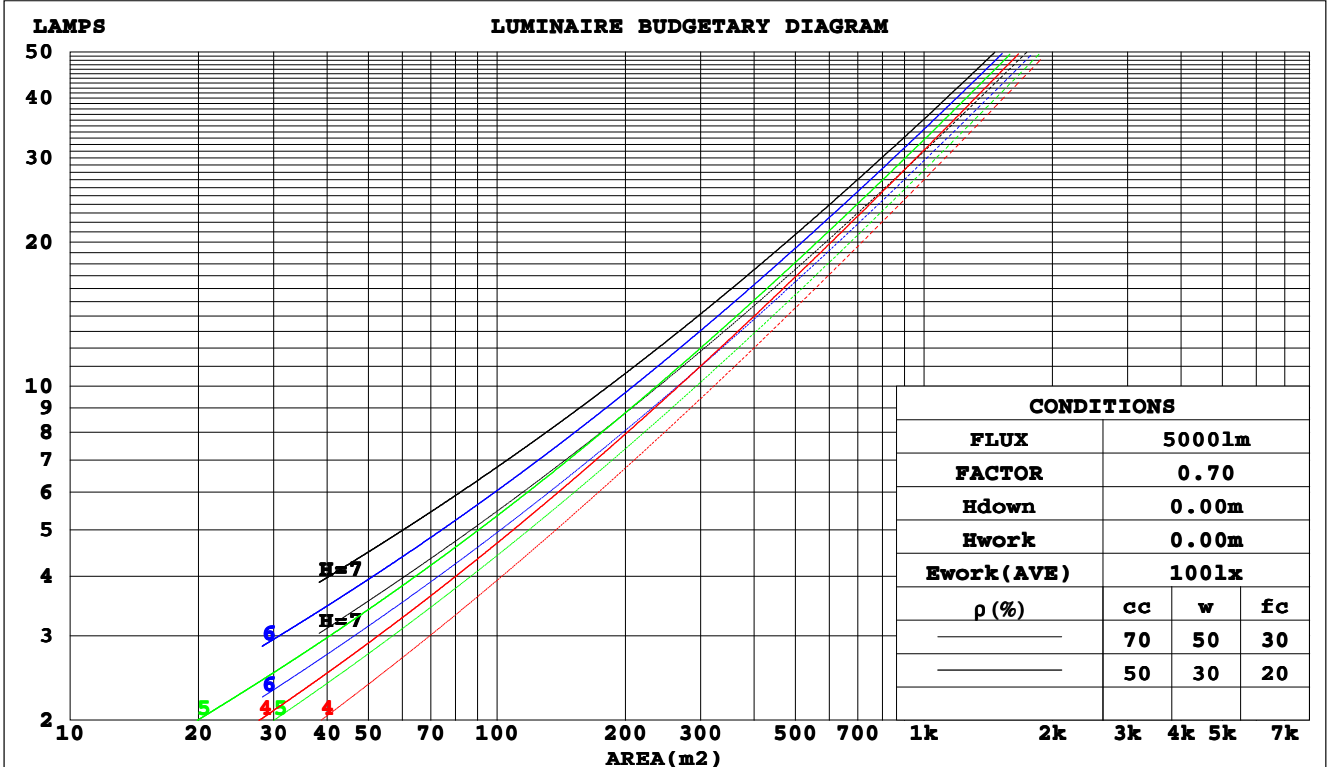

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.271	.154	.049	.264	.151	.048	.251	.144	.046	.239	.138	.044	.228	.132	.043	
2.0	.264	.145	.044	.258	.142	.044	.247	.137	.043	.236	.132	.041	.226	.128	.040	
3.0	.250	.133	.040	.245	.131	.039	.234	.127	.039	.225	.123	.038	.216	.120	.037	
4.0	.234	.122	.036	.229	.120	.035	.220	.117	.035	.212	.114	.034	.204	.111	.034	
5.0	.219	.112	.032	.215	.110	.032	.207	.108	.032	.199	.105	.031	.192	.103	.031	
6.0	.205	.103	.029	.201	.102	.029	.194	.099	.029	.187	.097	.029	.181	.095	.028	
7.0	.192	.095	.027	.188	.094	.027	.182	.092	.027	.176	.090	.026	.171	.089	.026	
8.0	.180	.088	.025	.177	.087	.025	.171	.086	.024	.166	.084	.024	.161	.083	.024	
9.0	.169	.082	.023	.167	.081	.023	.162	.080	.023	.157	.079	.022	.152	.077	.022	
10.0	.160	.077	.021	.157	.076	.021	.153	.075	.021	.148	.074	.021	.144	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.169	.132	.101	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.161	.114	.077	.138	.098	.067	.095	.068	.047	.055	.040	.028	.018	.013	.009	
4.0	.153	.101	.061	.131	.087	.053	.090	.061	.037	.052	.036	.022	.017	.012	.007	
5.0	.146	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006	
6.0	.139	.082	.040	.120	.071	.035	.083	.050	.025	.048	.029	.015	.015	.010	.005	
7.0	.133	.075	.034	.114	.065	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.029	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.014	.040	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm										
NAME: SNC-FL06-50WCT1A1					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: SNC OPTO ELECTRONIC CO.,LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	18.2	17.0	18.4	18.6	17.2	18.6	17.4	18.8	19.0
3H	17.6	18.9	17.9	19.1	19.4	18.0	19.4	18.3	19.6	19.8
4H	17.7	19.0	18.0	19.2	19.5	18.2	19.5	18.5	19.7	20.0
6H	17.7	18.9	18.0	19.1	19.4	18.2	19.4	18.6	19.7	19.9
8H	17.6	18.8	18.0	19.1	19.3	18.2	19.3	18.5	19.6	19.9
12H	17.6	18.7	17.9	19.0	19.3	18.1	19.2	18.5	19.5	19.8
4H 2H	17.2	18.5	17.5	18.7	19.0	17.5	18.8	17.9	19.1	19.3
3H	18.2	19.2	18.5	19.5	19.8	18.6	19.6	18.9	19.9	20.2
4H	18.3	19.3	18.7	19.6	20.0	18.8	19.8	19.2	20.1	20.5
6H	18.4	19.2	18.8	19.6	19.9	18.9	19.7	19.2	20.1	20.4
8H	18.3	19.2	18.8	19.5	19.9	18.8	19.6	19.2	20.0	20.4
12H	18.3	19.1	18.7	19.4	19.8	18.8	19.5	19.2	19.9	20.3
8H 4H	18.4	19.2	18.8	19.6	19.9	18.8	19.6	19.2	20.0	20.4
6H	18.4	19.1	18.9	19.5	19.9	18.9	19.6	19.3	20.0	20.4
8H	18.4	19.0	18.9	19.4	19.9	18.9	19.5	19.3	19.9	20.3
12H	18.4	18.9	18.9	19.4	19.8	18.8	19.3	19.3	19.8	20.3
12H 4H	18.3	19.1	18.8	19.5	19.9	18.8	19.5	19.2	19.9	20.3
6H	18.4	19.0	18.9	19.4	19.9	18.9	19.5	19.3	19.9	20.3
8H	18.4	18.9	18.9	19.4	19.8	18.8	19.3	19.3	19.8	20.3
Variations with the observer position at spacings:										
s = 1.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.5					+ 0.3 / - 0.6				
2.0H	+ 0.6 / - 0.6					+ 0.6 / - 0.6				

CIE Pub.117, 5763 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	48	42	58	48	41	35
0.80	70	59	52	69	59	52	68	58	52	45
1.00	79	69	62	78	68	62	76	69	61	54
1.25	86	76	70	85	76	70	82	74	69	62
1.50	91	82	76	89	81	75	87	79	74	67
2.00	98	90	84	96	89	83	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	93	102	97	92	98	94	90	82
4.00	108	103	99	106	101	97	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

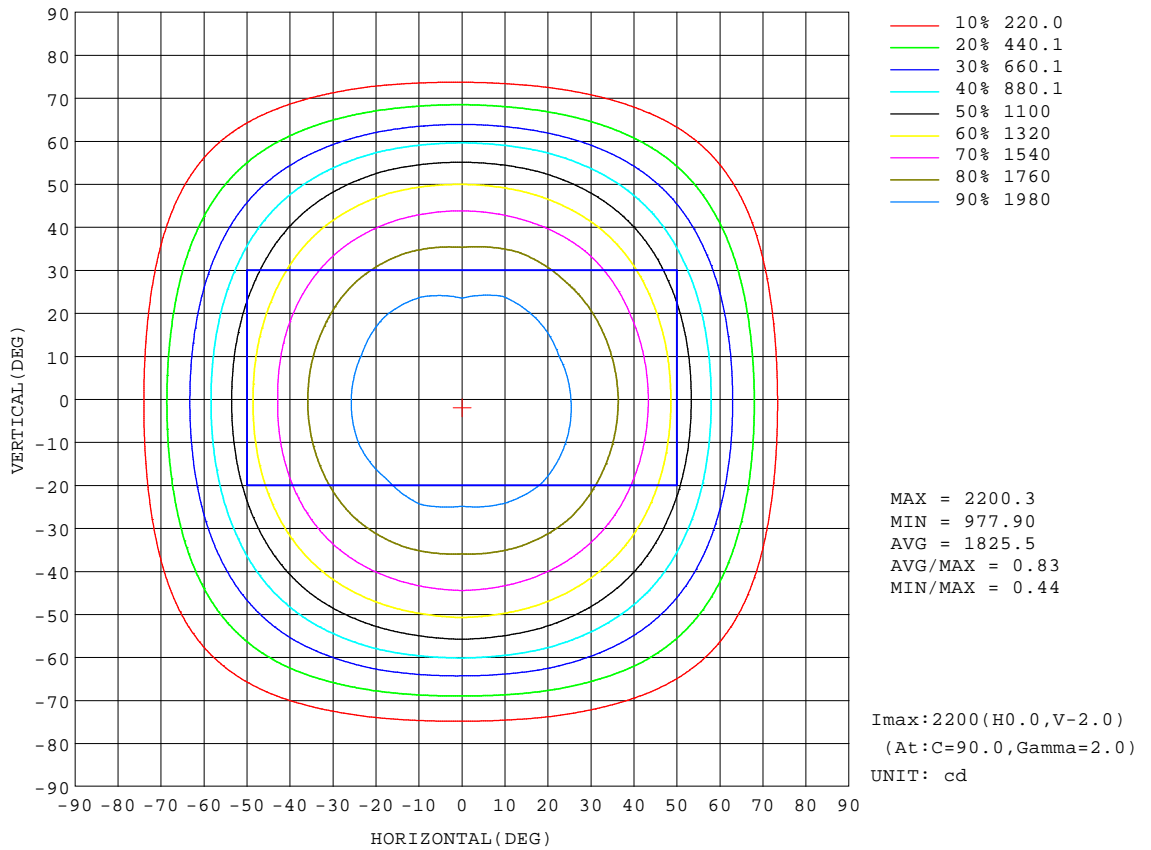


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

AAI Figure

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

Flux out:4405 lm

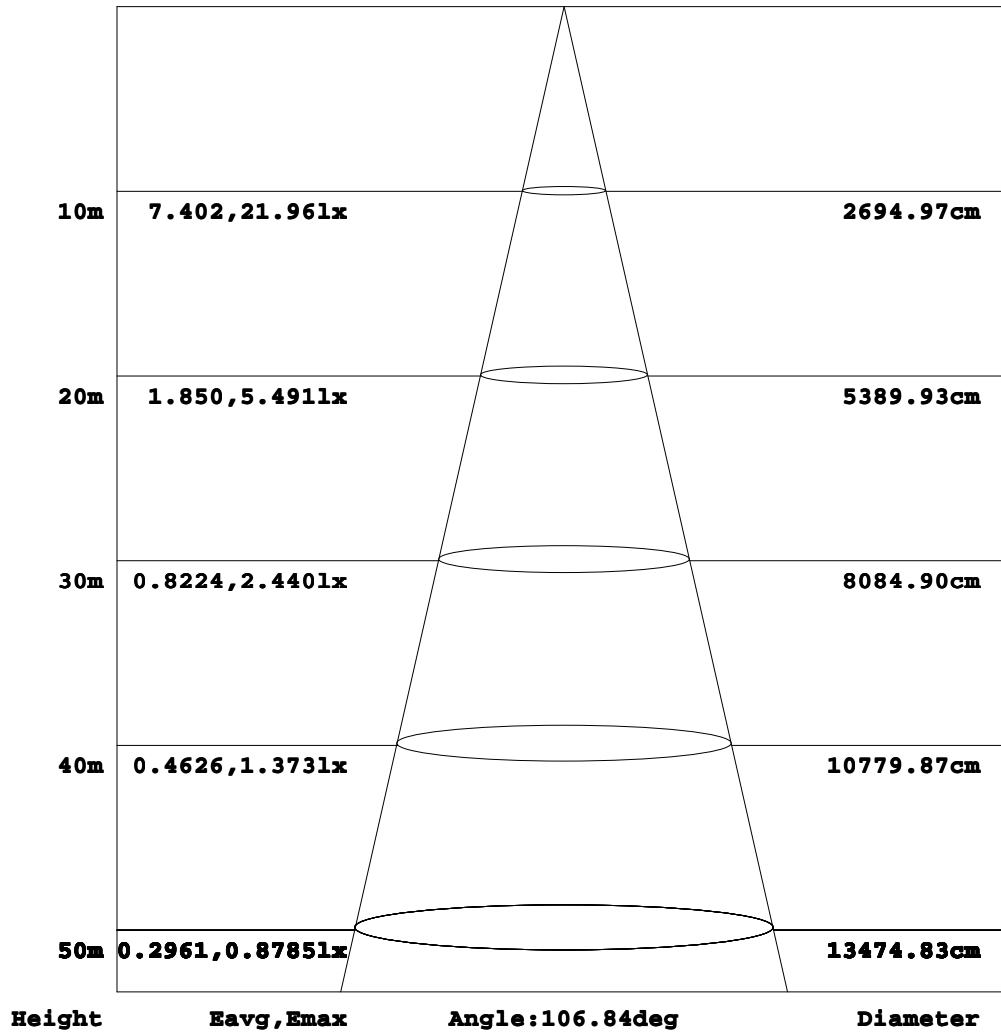


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27.3DEG
 Operators:Leo
 Test Date:2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity:44.8%
 Test Distance:26.000m [K=1.3311]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

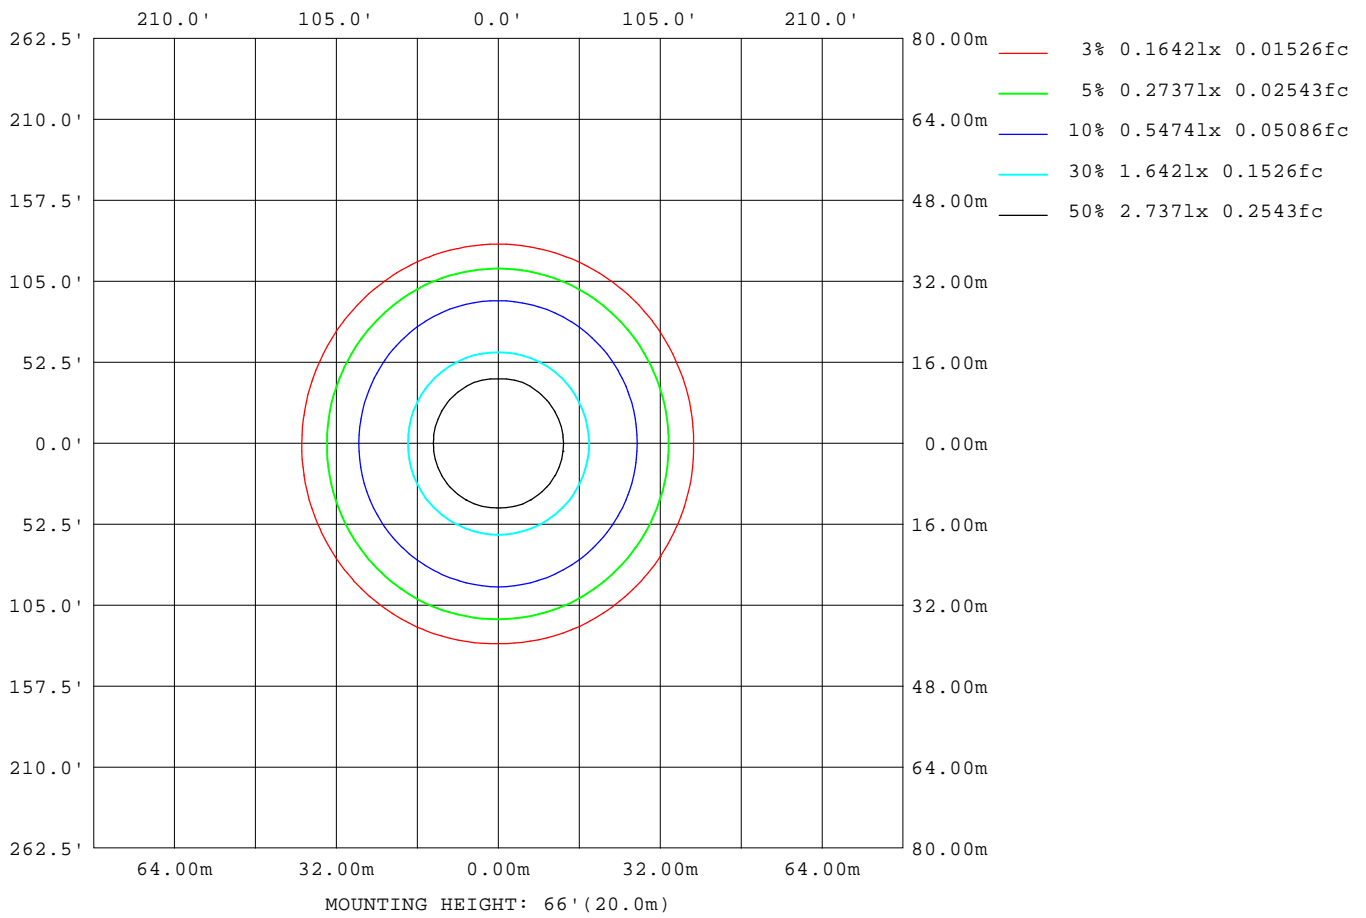

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks:

LED Avg.L Report

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13680
L_0~180(75)av	6808
L_0~180(85)av	2402
L_90~270(65)av	14517
L_90~270(75)av	7436
L_90~270(85)av	42
L_45(65)av	14249
L_45(75)av	7221
L_45(85)av	715

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27.3DEG
Operators:Leo
Test Date:2017-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity:44.8%
Test Distance:26.000m [K=1.3311]
Remarks:

Planar Illuminance Curve

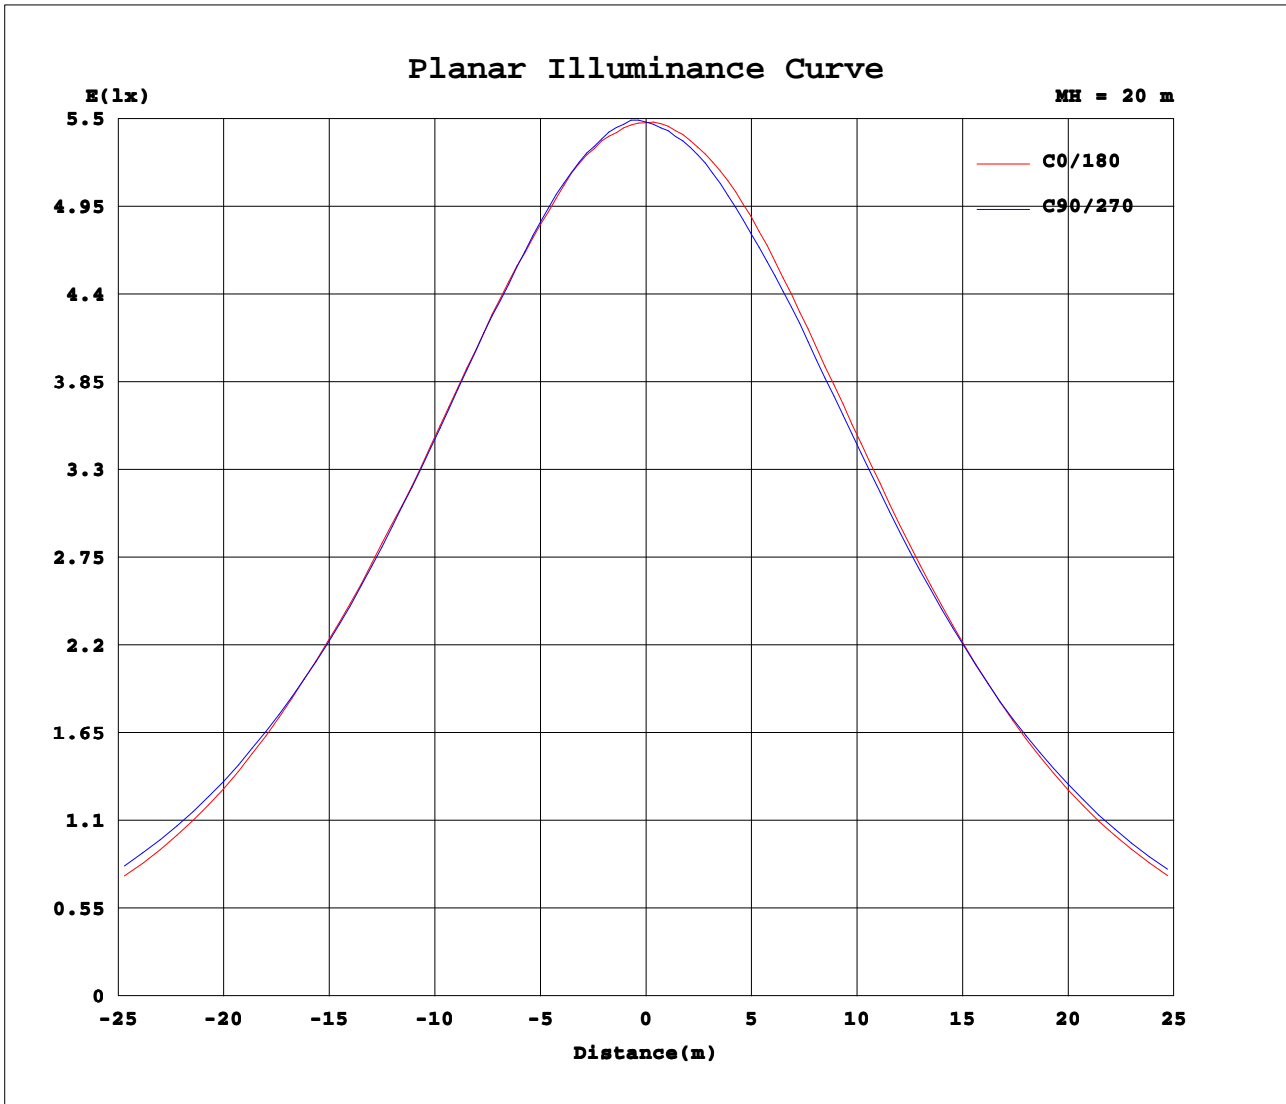

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27.3DEG
 Operators: Leo
 Test Date: 2017-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
 Humidity: 44.8%
 Test Distance: 26.000m [K=1.3311]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.4202A P:49.580W PF:0.9832 Freq:60.00Hz Lamp Flux:5762.52x1 lm		
NAME: SNC-FL06-50WCT1A1	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SNC OPTO ELECTRONIC CO.,LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190	2190			
5	2181	2189	2179	2185	2189	2176	2183	2191	2185	2179	2184	2178	2166	2185	2184	2175			
10	2161	2166	2155	2162	2160	2151	2163	2169	2166	2154	2154	2161	2131	2155	2158	2156			
15	2110	2129	2118	2127	2113	2109	2118	2130	2127	2116	2125	2109	2081	2112	2122	2111			
20	2061	2068	2075	2065	2053	2059	2060	2075	2067	2057	2072	2051	2030	2055	2066	2054			
25	1986	1999	2010	1996	1976	2000	1989	2000	1995	1985	2000	1987	1956	1992	1988	1976			
30	1895	1903	1909	1911	1889	1908	1907	1901	1899	1890	1897	1902	1867	1902	1895	1897			
35	1793	1797	1798	1798	1779	1798	1802	1786	1784	1778	1785	1788	1765	1796	1780	1784			
40	1659	1651	1664	1664	1667	1669	1665	1644	1639	1644	1656	1654	1641	1659	1657	1641			
45	1470	1480	1489	1513	1522	1514	1506	1488	1462	1475	1488	1500	1501	1494	1497	1472			
50	1254	1271	1298	1332	1352	1337	1313	1281	1258	1268	1299	1322	1315	1313	1294	1264			
55	1018	1035	1074	1118	1136	1122	1095	1055	1032	1037	1074	1104	1103	1097	1070	1035			
60	791	805	838	877	888	888	860	822	806	806	827	855	858	852	824	795			
65	569	585	611	627	625	637	628	601	587	583	588	602	602	596	582	567			
70	357	372	396	404	397	407	411	398	383	370	368	374	371	362	350	341			
75	168	181	198	214	216	221	214	199	185	180	175	177	169	167	160	162			
80	61.5	63.8	61.8	59.1	55.1	61.1	68.1	69.8	66.9	63.1	51.1	34.3	29.4	33.4	46.6	54.0			
85	20.7	18.1	7.46	2.49	0.73	2.56	7.54	18.3	21.1	17.4	5.52	0.25	0.00	0.25	4.41	15.0			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: Leo
Test Date: 2017-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.284
Humidity: 44.8%
Test Distance: 26.000m [K=1.3311]
Remarks: